

0312 KSS 标示扎线带 MARKER TIE







型号 Item No.	长 L		宽 W	最大束线径 Max.Bundle Dia.	承受力 Min LoopTensile Strength		标示牌尺寸 A X B	包装 Packing
	mm	inch			lbs	kgs		
MCV-100	100	4"	2.5	23	18	8	8 X 25	100pcs
MCV-100L	130	5 1/8"	2.5	22	18	8	28 X 20	
MCV-110	110	4 3/8"	2.5	20	18	8	8 X 25	
MCV-200	200	8"	4.6	50	50	22	28 X 13	
MCV-200S	200	8"	2.5	50	18	8	15 X 30	
MCV-200SS	200	8"	2.5	50	18	8	8 X 25	
MCV-270	270	11"	4.6	75	50	22	28 X 13	
MCV-300	300	11 7/8"	4.8	82	50	22	54.5 X 13	
MCV-350	350	11 3/4"	4.8	82	50	22	50 X 20	
MCV-370	370	14 9/16"	4.8	105	50	22	54.5 X 13	

材质：UL合格之NYLON 66 (本色)，防火等级94V-2。

特点：扎线带前端设有空白铭牌，可用油性笔在有砂纹面上书写，标志记号。

※如有印字需求，欢迎洽询。

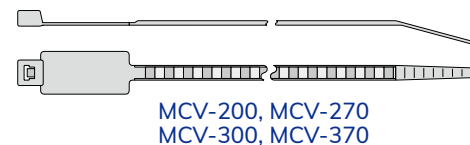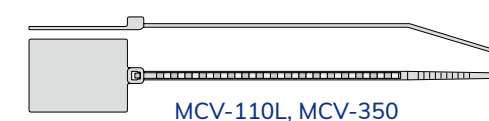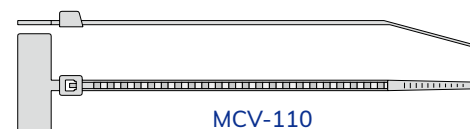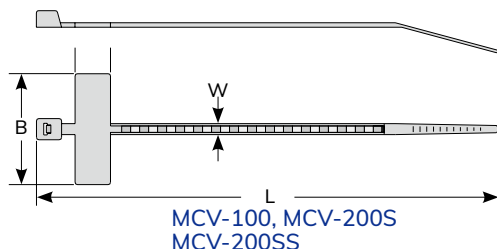

0313 KSS 铅封标示扎线带 SECURITY MARKER TIE



型号 Item No.	长 L		宽 W	最大束线径 Max.Bundle Dia.	标示牌尺寸 A X B	包装 Packing
	mm	inch				
SCT-190YW	191.5	7 1/2"	2.9	40	23.7 x 17.5	100pcs

材质：UL合格之NYLON 66 (黄色)，防火等级 94V-2。

用途：适用于保全、物流、运输、快递业、灭火器插鞘固定之铅封识别用。

※如有印字需求，欢迎洽询。

