


0703 KSS 自由绝缘保护套（U型）EDGING GROMMET



无卤素 环保

单位：mm

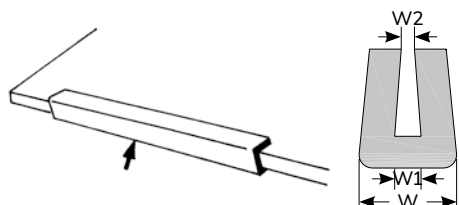

型 号 Item No.	W	W1	W2	适用铁板厚度 Available Thickness	包 装 Packing
ED-010	3.3	1.0	0.5	1.0 以下	每包 10M
ED-012	3.4	1.2	0.6	1.0~1.2	
ED-016	4.6	1.6	0.9	1.2~1.6	
ED-020	4.5	2.0	1.1	1.6~2.0	
ED-024	5.1	2.4	1.2	2.0~2.4	
ED-032	5.8	3.2	1.5	2.4~3.2	
ED-055	7.9	5.5	4.5	4.5~5.5	

材质：PE (本色)。

用法：依据铁板、PC板断面长度大小，截取所需之长度，直接套入断面即可。

用途：电线电缆之保护及绝缘。

0705 KSS 电源线扣 STRAIN RELIEF BUSHING



E98707 97798 无卤素 环保





材质：UL合格之NYLON 66 (黑色)，防火等级 94V-2。

用途：各种家电用品、仪器、电脑之电源线固定及保护用，避免电源线滑动而被铁板割伤。

※须搭配工具使用。

电源线扣装配图

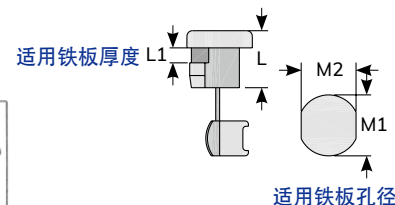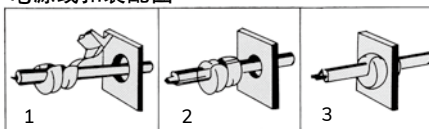

单位：mm

型 号 Item No.	适用电线 Wires Accommodate			铁板孔径 Mounting Hole		线扣长度 Part L. L	适用机板厚度 Available Thickness L1	包 装 Packing
	型 状	UL 线	尺寸	M1	M2			
SR-F21	扁线 Flat	SPT-1 2C #18	2.3X4.5 2.8X5.3	9.5	8.7	10.3	0.5-1.6	100pcs
SR-F23		SPT-1 2C #18	2.3X4.5 2.8X5.3	9.5	8.7	10.3	1.8-3.2	
SR-F31		SPT-1 2C #18	3.0X5.6	11.2	9.9	10.3	1.0-1.6	
SR-F32		SPT-1 2C #18	3.0X5.6	11.0	9.9	10.3	1.9-2.5	
SR-F41		SPT-2 2C #18	3.0X7.1 3.8X7.6	12.7	11.8	10.3	0.5-1.6	
SR-F42		SPT-2 2C #18	3.0X7.1 3.8X7.6	12.7	11.8	10.3	1.8-2.5	
SR-F51		SPT-3 2C #18	5X10.4	14.3	12.9	15.2	0.5-1.6	
SR-F53		SPT-3 2C #18	5X10.4	14.3	12.9	15.2	1.8-3.5	
SR-F83			6X15.2	21.6	21.3	20.4	2.0-3.4	
SR-5R1	圆线 Round	SVT 3C #18	Ø6.2~Ø7.4	12.8	11.5	11.0	0.5-1.6	
SR-5R2		SVT 3C #18	Ø6.2~Ø7.4	13.0	11.5	11.0	1.8-2.5	
SR-6W2		SJT 3C #18	Ø7.6	12.8	11.8	11.0	1.8-2.3	
SR-6P1		SJT 3C #18	Ø7.4~Ø8.2	15.9	14.0	14.8	0.5-1.6	
SR-6P3		SJT 3C #18	Ø7.4~Ø8.2	15.9	14.0	14.8	1.9-3.2	
SR-6R1		SJT 3C #16	Ø8.2~Ø9.2	15.9	14.0	14.8	0.5-1.6	
SR-6R3		SJT 3C #16	Ø8.2~Ø9.2	15.9	14.0	14.8	1.9-3.2	
SR-7R1		SJT 3C #14	Ø9.2~Ø10.5 Ø11	19.9	17.0	19.0	0.5-1.6	
SR-7R3		SJT 3C #14	Ø9.2~Ø10.5 Ø11	19.7	17.0	19.0	1.9-3.2	
SR-8R3		SJT 3C #14	Ø12~Ø15.2	21.6	21.3	20.6	1.9-3.2	
SR-9R1	电源供应器专用	#18 20~30 pcs	Ø11~Ø15	15.0	19.0	18.0	0.5-1.6	
SR-9R7		SJT 3C #10	Ø15.2~Ø16.3 Ø17.5	28.0/30.2	25.5	25.0	1.0-3.2	

配线槽

配线标志

扎线带

结束带

固定座

固定头、浪管

保护部品

接线头

套管

固定夹

PC板部品

扣具