


1109 KSS 粘式PC板隔离柱 SELF-ADHESIVE PCB SUPPORT



单位: mm




型 号 Item No.	间 距 H1	适用PC板		包 装 Packing
		钻孔 M1	板厚 T1	
MMR-5	4.8	3.2	1.6	100pcs
MMR-6	6.4			
MMR-8	7.9			
MMR-9	9.5			
MMR-11	11.1			
MMR-13	12.7			
MMR-14	14.3			
MMR-16	15.9			

材质: UL合格之NYLON 66 (本色), 防火等级 94V-2, 底座背胶。
用途: 用于无法钻孔之机板与PC板间的固定。


1110 KSS PC板轨道 CIRCUIT BOARD TRACK




单位: mm

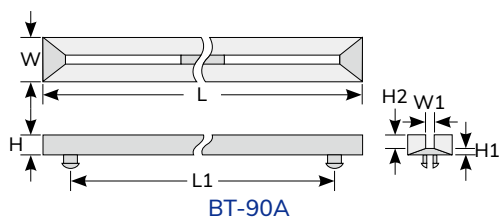


BT-90A

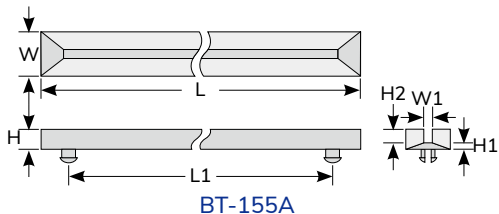


BT-155A

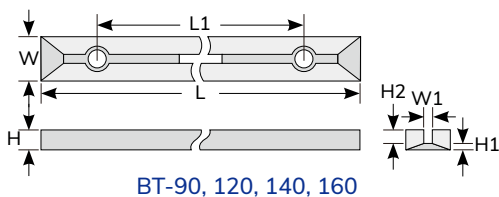

BT-90, 120, 140, 160

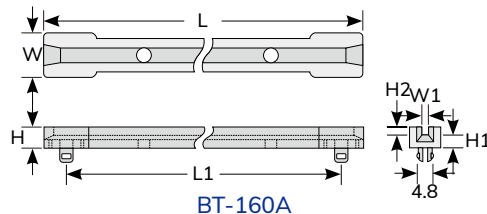

BT-160A

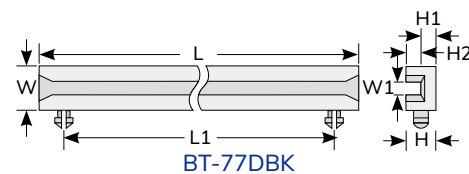

BT-77DBK

型 号 Item No.	L	L1	W	W1	H	H1	H2	包 装 Packing
BT-90A	89.5	77.6	9.7	2.0	4.5	1.5	3.0	100pcs
BT-90	89.5	64.4	9.7	2.0	4.5	1.5	3.0	
BT-120	120.0	95.5	9.5	2.0	4.5	1.5	3.0	
BT-140	141.0	115.4	10.0	1.9	4.5	1.5	3.0	
BT-155A	154.0	141.0	6.6	2.0	4.6	1.3	3.3	
BT-160	160.5	135.5	9.7	2.0	4.5	1.5	3.0	
BT-160A	162.0	148.2	9.6	2.0	6.5	4.0	2.5	
BT-77DBK	77.0	67.0	6.6	1.4	6.0	3.0	3.0	黑色

材质: UL合格之NYLON66 (本色), 防火等级 94V-2。
用法: 以3mm x 6mm平底螺丝及螺帽 2组, 将轨道固定。再将 PC板嵌入即可。
轨道中增有 2个防震片可保护 PC板。
★BT-90A,BT-155A,BT-160A设有 2片插鞘可免用螺丝固定、直接插入即可。

配线槽

配线标志

扎线带

结束带

固定座

固定头、浪管

保护部品

接线头

套管

固定夹

PC板部品

扣具