

1201 KSS 插鞘式扣线套 WIRE SADDLE




单位: mm



型 号 Item No.	尺 寸 Dimension				基板孔径 M1	适用板厚 T1	包 装 Packing
	L	W1	H1	H2			
JWS-0402V0	5.0	4.5	5.1	2.8	3.5	0.5~1.6	100pcs
JWS-0504V0	5.1	5.3	6.3	4.4	3.5	0.5~1.6	

材质: UL合格之NYLON 66 (白色), 防火等级 94V-0。



1201 KSS 插鞘式扣线套 WIRE SADDLE




单位: mm



型 号 Item No.	尺 寸 Dimension				基板孔径 M1	适用板厚 T1	包 装 Packing
	L	W1	H1	H2			
JWB-0706	4.0	7.7	9.7	6.4	3.0	1.6	100pcs
JWS-0605V0	3.8	6.6	7.8	5.0	3.5	1.6	
JWS-0706V0	3.8	7.9	9.7	6.4	3.5	1.6	
JWS-0910	4.0	9.3	13.4	10.7	3.5	1.0	

材质: JWS-0605V0, JWS-0706V0为UL合格之NYLON 66 (白色), 防火等级 94V-0。

JWS-0910, JWB-0706为UL合格之NYLON 66 (本色), 防火等级 94V-2。

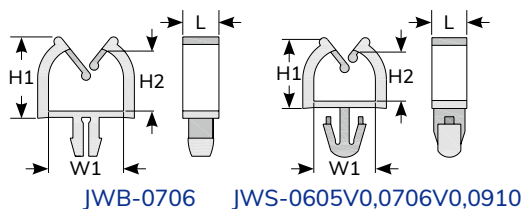

1201 KSS 马鞍型夹线套(钩式) LOCKING WIRE SADDLE



单位: mm



型 号 Item No.	尺 寸 Dimension				适用PC板		包 装 Packing
	W1	H1	H2	H3	钻孔 M1	板厚 T1	
KWS-0	11.0	13.0	4.0	9.0	4.8	2.0	100pcs
KWS-1	11.0	19.0	10.5	14.2	4.8	2.0	
KWS-2	11.0	27.0	19.0	23.0	4.8	2.0	
KWS-2L	10.4	18.0	12.0	15.0	4.8	4.0	
KWS-3	11.0	35.8	28.0	31.1	4.8	2.0	

材质: UL合格之NYLON 66 (本色), 防火等级 94V-2。

用法: 基板钻孔 4.8mm, 先把夹线套固定, 再将欲固定之电线放入套中、从两侧轻轻一扣, 即可将电线牢牢扣住, 可作任何方向与角度的固定电线之用。

