


1202 KSS 马鞍型夹线套 LOCKING WIRE SADDLE



无卤素 环保


单位 : mm

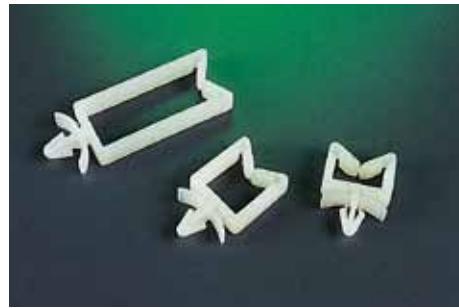

型号 Item No.	尺寸 Dimension				适用PC板		包装 Packing
	W1	H	H1	H2	钻孔 M1	板厚 T1	
KWS-0N	11.0	12.7	9.2	4.0	4.8	2.0	100pcs
KWS-1N	11.0	17.9	14.8	9.6	4.8	2.0	
KWS-2N	11.3	26.7	23.4	18.4	4.8	2.0	
KWS-3N	11.0	34.8	31.3	26.2	4.8	2.0	
KWS-1114	10.7	21.2	17.8	13.7	4.8	2.4	

材质 : UL合格之 NYLON 66 (本色), 防火等级 94V-2。

用法 : 基板钻孔 4.8mm, 先把夹线套固定, 再将欲固定之电线放入套中, 即可将电线牢牢扣住, 可作任何方向与角度的固定电线之用。

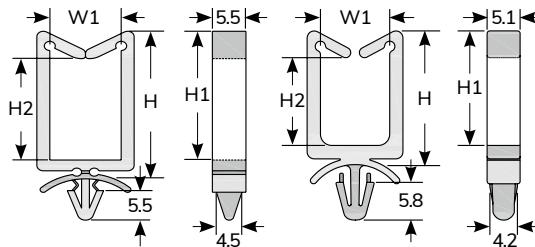

KWS-0N,1N,2N,3N

KWS-1114

1202 KSS 马鞍型夹线套 LOCKING WIRE SADDLE



无卤素 环保





单位 : mm





型号 Item No.	尺寸 Dimension				适用PC板		包装 Packing
	W	W1	H2	钻孔 M1	板厚 T1		
KWS-0506	9.0	5.0	5.4	4.8	3.0		100pcs
KWS-1106	13.0	10.5	5.4	4.8	1.6		
KWS-1110	14.4	10.9	9.8	如图	2.2		
KWS-1308	17.2	12.7	8.5	5.8	1.6		
KWS-1310	18.8	13.0	9.9	如图			
KWS-2314	28.3	22.9	13.6	4.8	3.4		

材质 : UL合格之 NYLON 66 (本色), 防火等级 94V-2。

用法 : 先将基板钻孔, 再把夹线套固定, 再将欲固定之电线放入套中, 即可将电线牢牢扣住, 可作任何方向与角度的固定电线之用。



KWS-1308



基板钻孔

配线槽

配线标志

扎线带

结束带

固定座

固定头、浪管

保护部品

接线头

套管

固定夹

PC板部品

扣具