


1202 KSS 壁虎型夹线套 WIRE SADDLE

单位 : mm



| 型 号 Item No. | 尺 寸 Dimension | | | 基板孔径 M1 | 适用孔深 T1 | 包 装 Packing |
|-----------------|---------------|------|------|------------|------------|----------------|
| | W1 | H1 | H2 | | | |
| BWS-1106 | 11.1 | 13.0 | 5.0 | 7.8 | 8.7 | 100pcs |
| BWS-1112 | 11.1 | 18.3 | 10.3 | | | |
| BWS-1120 | 11.1 | 27.2 | 19.2 | | | |
| BWS-1128 | 11.1 | 35.6 | 27.8 | | | |


材质 : UL合格之 NYLON 66 (本色) , 防火等级 94V-2。



1203 KSS N型夹线套 N TYPE WIRE SADDLE




单位 : mm

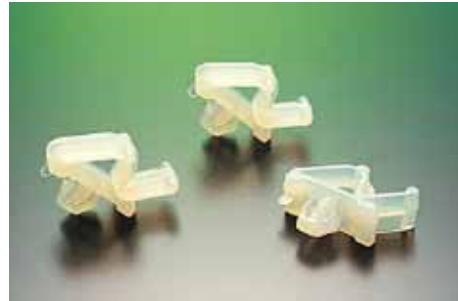

| 型 号 Item No. | 尺 寸 Dimension | | | 包 装 Packing |
|-----------------|---------------|------|-----|----------------|
| | W1 | H1 | H2 | |
| PCC-1 | 10.6 | 10.7 | 6.3 | 100pcs |

材质 : UL合格之 NYLON 66 (本色) , 防火等级 94V-2。

用法 : 基板钻孔 5.6mm , 先把夹线套固定 , 即可将电线扣住。



1204 KSS 分线型夹线套 WIRE SADDLE




单位 : mm



| 型 号 Item No. | 尺 寸 Dimension | | | | | 包 装 Packing |
|-----------------|---------------|------|----|-----|-----|----------------|
| | W1 | W2 | W3 | H2 | H3 | |
| TWS-3 | 16.3 | 24.8 | 27 | 8.4 | 8.8 | 100pcs |

材质 : UL合格之 NYLON 66 (本色) , 防火等级 94V-2。

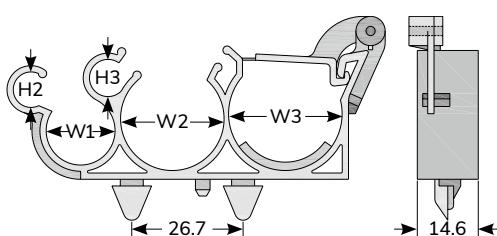

配线槽

配线标志

扎线带

结束带

固定座

固定头、浪管

保护部品

接线头

套管

固定夹

PC板部品

扣具