

## 1204 KSS 圆型夹线套 WIRE SADDLE




单位 : mm



型 号 Item No.	尺 寸 Dimension		适用PC板		包 装 Packing
	W1	H1	钻孔 M1	板厚 T1	
RH-5	5.1	8.0	5.5	2.0	100pcs
RH-6	6.2	9.5	8.0	1.8	
RH-8	7.5	11.5	6.2	2.0	
RH-9	9.6	18.0	9.5	2.0	

材质 :UL合格之 NYLON 66 (本色) , 防火等级 94V-2。

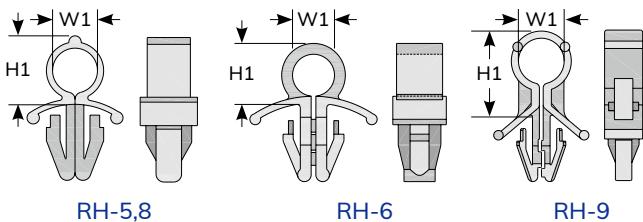

## 1204 KSS C型夹线套 WIRE SADDLE




单位 : mm



型 号 Item No.	尺 寸 Dimension H2	适用PC板		包 装 Packing
		钻孔 M1	板厚 T1	
RWS-6	6.2	6.0	2.0	100pcs
RWS-7		7.8	2.0	

材质 :UL合格之 NYLON 66 (本色) , 防火等级 94V-2。

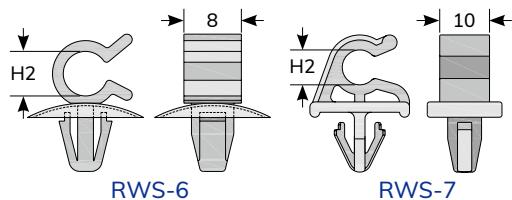

## 1204 KSS 双导线夹线套 DOUBLE ROUTING CLIP




单位 : mm



型 号 Item No.	W1	H1	适用PC板		包 装 Packing
			钻孔 M1	板厚 T1	
DR-6	6.2	7.7	3.2	2.0	100pcs

材质 : UL合格之 NYLON 66 (本色) , 防火等级 94V-2。

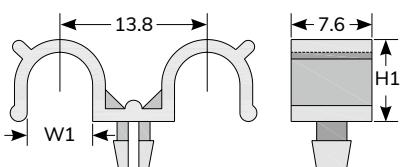

配线槽

配线标志

扎线带  
结束带

固定座

固定头、浪管  
保护部品

接线头

套管

固定夹

PC板部品

扣具