

## 1215 KSS 粘贴式扭线环 MOUNTING TWIST TIE




单位 : mm



型 号 Item No.	W	W1	H	束线范围 Bundle Diameter	包 装 Packing
TTB-08	17.4	7.9	27.5	7~10	100pcs
TTB-15	22.0	14.8	35.2	10~15	
TTB-20	25.5	20.6	40.0	15~20	


材质 : UL合格之 NYLON 66 (本色), 防火等级94V-2, 底座背胶。

特点 : 1. 粘贴式设计, 可省去面板钻孔之麻烦。  
2. 束线简易、牢固, 并可松开, 多次重复使用。

## 1216 KSS 粘贴式扣线套 ADHESIVE WIRE SADDLE




单位 : mm

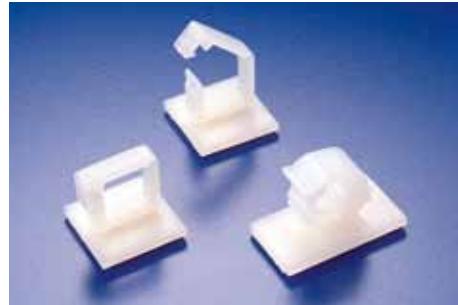

型 号 Item No.	L	W	W1	H2	包 装 Packing
AWS-11	19.8	20.0	11.2	11.0	100pcs
AWS-9R	16.0	29.8	8.5	13.6	
AWS-1210	18.3	20.7	11.3	10.0	
AWS-0912	9.5	15.8	9.0	11.6	

材质 : UL合格之 NYLON 66 (本色), 防火等级94V-2, 底座背胶。

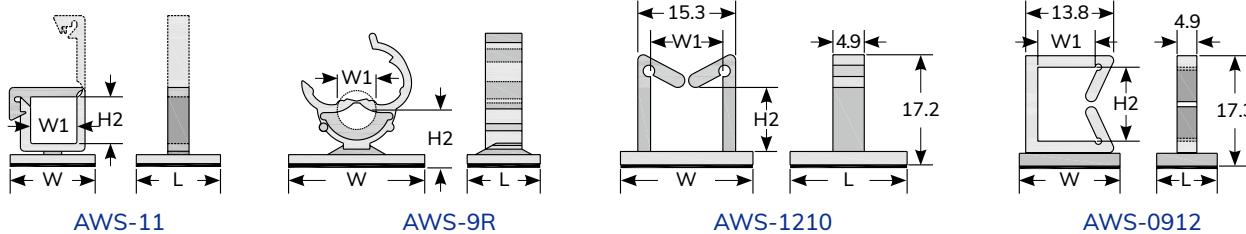

## 1217 KSS 高压隔离线圈 SPACERS RING



单位 : mm



型 号 Item No.	H1	H2	O.D.	包 装 Packing
SPR-8V0	14.2		28.0	100pcs
SPR-45V0	26.3	22	49.2	

材质 : UL合格之 NYLON 66 (白色), 防火等级 94V-0。

