


# 0519 KSS 可调式配线固定座 ADJUSTABLE CABLE CLAMP



单位 : mm

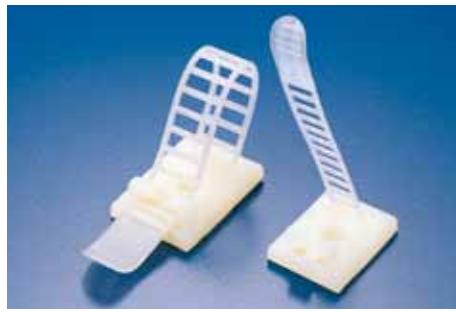


型号 Item No.	L	W	W1	H	固定孔 M	最大束线径 Max.Bundle Dia.	包装 Packing
ATC-17	25.0	18.0	7.9	70	3.6	17.0	100pcs
ATC-22	30.5	21.0	12.0	90	3.4	22.0	
ATC-26	30.5	21.0	12.0	108	3.4	26.0	

材质：UL合格之NYLON 66 (本色)，防火等级 94V-2，底座背胶。

用法：使用时将离型纸撕去，固定于基板之上，再将带身穿入卡沟即可固定、束紧。

特点：1. 阶梯型带身，可随意调整松紧。


2. 装配简单、快速、牢固，开启容易，可多次重复使用。

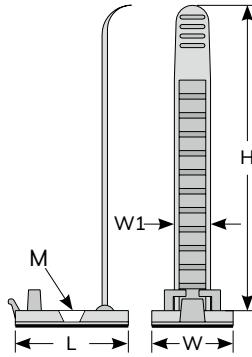

# 0520 KSS 粘式固定夹 SELF-ADHESIVE WIRE CLIP



单位 : mm

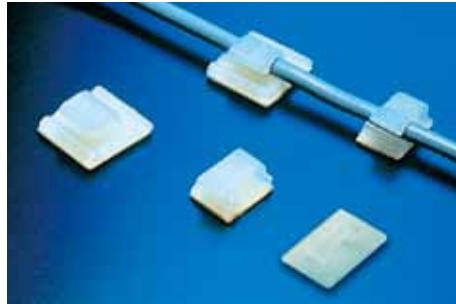

NEW

型号 Item No.	L	L1	W	W1	H	束线径 H1	包装 Packing
FC-1	13.0	8.0	9.5	6.5	5.2	2.8	100pcs
FC-2	16.0	4.0	15.5	9.0	6.8	4.0	
FC-2L	16.2	5.1	16.2	10.9	6.2	3.8	
FC-3	16.0	12.5	16.0	7.2	6.8	3.7	
FC-4	27.0	14.8	17.0	7.3	8.7	5.5	
FC-0601	19.1	6.4	12.9		2.2	0.9	
FC-1001	11.9	9.3	6.0		3.5	1.0	
FC-1206	16.0	11.9	15.8	8.9	9.0	5.8	

材质：UL合格之NYLON 66 (本色)，防火等级 94V-2，底座背胶。

用法：使用时将离型纸撕去，固定于基板之上，再将电线扣上即可。

特点：装配简单、快速、牢固，开启容易，可多次重复使用。

