

0107 KSS 分隔型配线槽 MULTI-COMPARTMENT WIRING DUCT



型号 Item No.	宽 W mm	高 H mm	W1 mm	W2 mm	W3 mm	长度 L
WD-2010-2WE	20	10.3	7.5	7.5		2M
WD-3010-2WE	30	11.2	12.5	12.5		
WD-4010-3WE	40	10.3	11.0	11.5	11.5	
WD-5020-3WE	50.8	20.3	14.8	10.0	14.8	
WD-10040-3WE	100	40.0	32.8	23.2	32.8	
※ WD-11060WE	111	61.4	43.3	16.0	43.3	






材质：UL合格之南亚PVC (白色)，防火等级美规94V-0及欧规M1，PVC耐温85℃。

构造：由槽底及槽盖两部份组成。

特点：1.底槽分隔型设计，可使电源线及讯号线分开配线，避免互相干扰，便于日后查线维修。

2.槽盖经特殊设计，与配线槽底座组合后不易脱落，且接合面平滑，不割伤手及电线。

※ WD-11060WE无隔板。

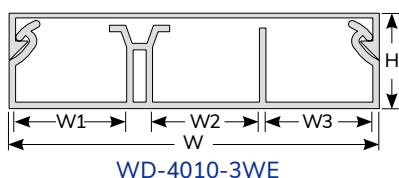

0108 KSS 分隔型配线槽接头 WIRING DUCT CONNECTOR



材质：UL合格之ABS (白色)，防火等级94HB。

用途：适用于各种接处之修饰用，整齐美观，大量节省工时。

接头种类 Type	型号 Item No.	适用线槽 Used With	包装 Packing
	WDM-2010WE	WD-2010-2WE	20pcs
	WDM-3010WE	WD-3010-2WE	
	WDM-4010WE	WD-4010-3WE	
	WDM-5020WE	WD-5020-3WE	
	WDT-2010WE	WD-2010-2WE	20pcs
	WDT-3010WE	WD-3010-2WE	
	WDT-4010WE	WD-4010-3WE	
	WDT-5020WE	WD-5050-3WE	
	WDI-2010WE	WD-2010-2WE	10pcs
	WDI-3010WE	WD-3010-2WE	
	WDI-4010WE	WD-4010-3WE	
	WDI-5020WE	WD-5020-3WE	
	WDI-11060WE	WD-11060WE	

接头种类 Type	型号 Item No.	适用线槽 Used With	包装 Packing
	WDO-2010WE	WD-2010-2WE	20pcs
	WDO-3010WE	WD-3010-2WE	
	WDO-4010WE	WD-4010-3WE	
	WDO-5020WE	WD-5020-3WE	
	WDO-11060WE	WD-11060WE	
	WDL-2010WE	WD-2010-2WE	20pcs
	WDL-3010WE	WD-3010-2WE	
	WDL-4010WE	WD-4010-3WE	
	WDL-5020WE	WD-5020-3WE	
	WDL-11060WE	WD-11060WE	
	WDE-2010WE	WD-2010-2WE	20pcs
	WDE-3010WE	WD-3010-2WE	
	WDE-4010WE	WD-4010-3WE	
	WDE-5020WE	WD-5020-3WE	