




0220 KSS N型配线标志 N TYPE CABLE MARKER



VS型



S型





N型

型号 Item No.	适用电线 Suitable Wire	适用范围 mm	规格 Size mm			号码种类 Std. Markings	包装 Packing
	sq		L	I.D.	Ø2		
VS-1	0.12~0.3	0.95~1.3	2.3	0.9	1.7	0,1,2,...,9 A,B,C,...,Z +,-	每支 30个装
S-1	0.5	1.9~2.2	3.0	1.8	2.8		
N-1	0.75~1.25	2.8~3.4	3.0	2.7	3.9		
N-2	2.0~3.5	3.4~4.6	3.0	3.2	4.6		
N-3	3.5~5.5	4.6~5.9	3.0	4.4	5.8		


材质：NYLON 66 (白色)。

用法：将喇叭口合于电线 (如左图)，再用手指推挤标志，使标志滑到电线上牢牢夹住。

0225 KSS OC型配线标志 OC TYPE CABLE MARKER

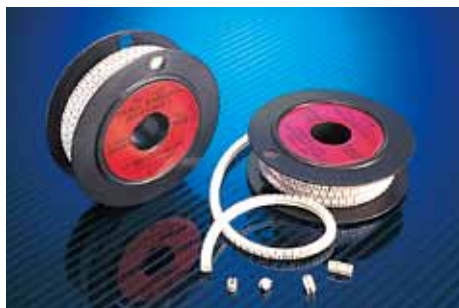

标准设计



OC-8

型 号 Item No.	适用电线 Suitable Wire		I.D. 适用范围 mm	长 L mm	号码种类 Std. Markings	包装 Packing
	sq	AWG				
OC-1	0.5~0.75	20~18	2.5~3.0	4	0 ~ 9 , A ~ Z /, +, -, 空白 (特殊符号接受订制)	每卷 1000pcs
OC-2	1.25~2.0	16~14	3.2~3.6			
※ OC-2L	1.25~2.0	16~14	3.2~3.6			
OC-3	3.5~5.5	12~10	4.2~5.1			
OC-4	5.5~8.0	10~8	5.1~6.2			
OC-8	14	6	7.5~8.0	6.0		每卷 500pcs
						每卷 300pcs

材质：UL合格之南亚PVC (白色)，防火等级美规94V-0及欧规M1，PVC耐温85℃。

用法：线路配妥后再行嵌入即可。使用一种规格能适用两种规格之电线。

※OC-2L开口较大