

0301 KSS 金属可探测尼龙扎线带 METAL DETECTABLE CABLE TIE



无卤素 环保

NEW




型号 Item No.	长 L		宽 W	最大束线径 Max.Bundle Dia.	承受力 Min LoopTensile Strength		包装 Packing
	mm	inch			lbs	kgs	
CV-100MD	100	4"	2.5	22	14	6	100pcs
CV-150MD	150	6"	3.6	36	25	11	
CV-200MD	203	8"	4.6	52	34	15	
CV-200MMD	203	8"	2.5	55	14	6	
CV-250MD	250	10"	4.8	68	34	15	
CV-280MD	280	11"	4.8	77	34	15	
CV-380MD	380	15"	7.6	105	88	39	
CV-385MD	385	15 3/16"	4.8	110	34	15	
CV-400MD	400	15 3/4"	4.6	116	34	15	

材质：NYLON 66内含金属粉 (蓝色)，防火等级94HB。

用法：将扎线带尾巴穿过头部，即可束紧。

特点：适用于食品及医疗产业，符合FDA，可用金属感应器检测。

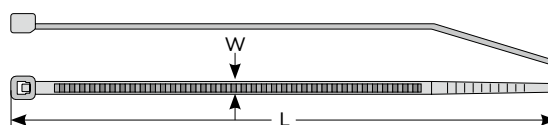

0301 KSS 耐燃尼龙扎线带 FLAME RETARDANT CABLE TIE




94V-0 无卤素 环保



型号 Item No.	长 L		宽 W	最大束线径 Max.Bundle Dia.	承受力 Min LoopTensile Strength		包装 Packing
	mm	inch			lbs	kgs	
CV-100V0	100	4"	2.5	22	18	8	100pcs
CV-150V0	150	6"	3.6	36	40	18	
CV-200MV0	203	8"	2.5	55	18	8	
CV-200V0	203	8"	4.6	52	50	22	
CV-300SV0	300	11 7/8"	4.8	83	50	22	
CV-368V0	368	14 1/2"	4.8	105	50	22	
CV-380V0	380	15"	7.6	105	120	55	

材质：UL合格之 NYLON 66 (白色)，防火等级 94V-0。

特点：防火等级 94V-0，可用于防火、耐燃之场所。

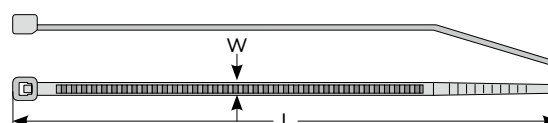

0301 KSS 耐热尼龙扎线带 EXTRA HIGH TEMPERATURE CABLE TIE



无卤素 环保

NEW



型号 Item No.	长 L		宽 W	最大束线径 Max.Bundle Dia.	承受力 Min LoopTensile Strength		包装 Packing
	mm	inch			lbs	kgs	
CV-100N46	100	4"	2.5	22	18	8	100pcs
CV-150N46	150	6"	3.6	36	40	18	
CV-200N46	203	8"	4.6	52	50	22	
CV-300SN46	300	11 7/8"	4.8	83	50	22	
CV-380N46	380	15"	7.6	105	120	55	
CV-385N46	385	15 3/16"	4.8	110	50	22	

材质：UL合格之 NYLON46 (褐色)，防火等级94V-2。

用法：将扎线带尾巴穿过头部，即可束紧。

特点：耐温可至150°C，可用于超高温之场所。



配线槽

配线标志

扎线带

结束带

固定座

固定头、浪管

保护部品

接线头

套管

固定夹

PC板部品

扣具