

0301 KSS 耐寒尼龙扎线带 COLD WEATHER CABLE TIE




型号 Item No.	长 L		宽 W	最大束线径 Max.Bundle Dia.	承受力 Min LoopTensile Strength		包装 Packing
	mm	inch			lbs	kgs	
CV-150CWBK	150	6"	3.6	36	40	18	100pcs
CV-200DCWBK	203	8"	4.8	52	50	22	
CV-250CWBK	250	10"	4.8	68	50	22	
CV-292CWBK	292	11 1/2"	3.6	82	40	18	
CV-300SCWBK	300	11 7/8"	4.8	83	50	22	
CV-368CWBK	368	14 1/2"	4.8	105	50	22	
CV-370CWBK	370	14 9/16"	7.6	101	120	55	
CV-380CWBK	380	15"	7.6	105	120	55	
CV-385CWBK	385	15 3/16"	4.8	110	50	22	
CV-450CWBK	450	17 3/4"	8.0	128	120	55	

材质：UL合格之NYLON66 (黑色)，防火等级94HB。

用法：将扎线带尾巴穿过头部，即可束紧。

特点：1. 适用于低温环境。可抗紫外线。

2. 最低安装温度：-20°C; 最低操作温度：-40°C

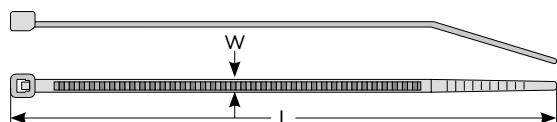

0301 KSS PP扎线带 POLYPROPYLENE CABLE TIE



型号 Item No.	长 L		宽 W	最大束线径 Max.Bundle Dia.	承受力 Min LoopTensile Strength		包装 Packing
	mm	inch			lbs	kgs	
CV-150PPBK	150	6"	3.6	36	18	8	100pcs
CV-200PPBK	200	8"	4.6	52	22	10	
CV-240LPPBK	240	9 7/16"	7.6	61	51	23	
CV-250PPBK	250	10"	4.8	68	22	10	
CV-300PPBK	300	11 7/8"	7.6	80	51	23	
CV-380PPBK	380	15"	7.6	105	51	23	
CV-550PPBK	550	21 11/16"	8.0	160	51	23	

材质：PP。

颜色：黑色(另备有本色)。

用途：适合化工产业之管线固定用，可提升扎线带于化学性(酸硷)环境之耐用度。

